



BS-800 Modular System

Clinical Chemistry Solution

mindray
healthcare within reach

BS-800 Modular System

Clinical Chemistry Solution



Total Solution for Clinical Chemistry

BS-800 Modular System combines innovation and high performance into an integrated solution. With an expandable platform, an ever more complete line of chemistry reagents, as well as calibrators and controls, our new solution package can be tailor made to your needs. Innovative technologies built in also ensure your solution is accurate, convenient and cost-efficient.

Modular System

BS-800

Throughput: 800/1200T/H

Sample capacity: 140

Reagent capacity: 68



BS-800M1

Throughput: 800/1200T/H

Sample capacity: 440

Reagent capacity: 68



BS-800M2

Throughput: 1600/2400T/H

Sample capacity: 580

Reagent capacity: 136



BS-800M3

Throughput: 2400/3600T/H

Sample capacity: 720

Reagent capacity: 204



BS-800M4


Throughput: 3200/4800T/H

Sample capacity: 860

Reagent capacity: 272




Accurate

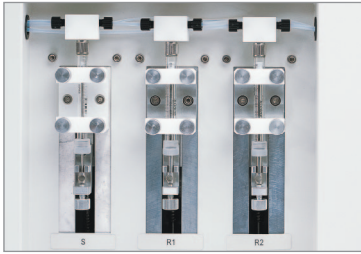

- **High sampling precision**
15~300 μL reagent sampling with step at 0.5 μL , 1.5~35 μL specimen sampling with step at 0.1 μL



- **Water circulation reagent cooling**
Ensures a stable 2~8 $^{\circ}\text{C}$ refrigeration temperature in reagent disk

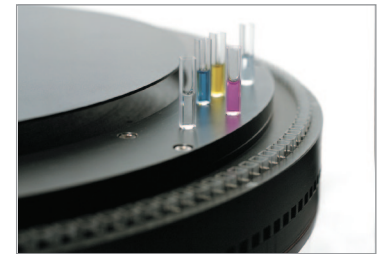


- **Direct solid-heating system**
Fast heating of reaction disk, ensures temperature is kept at 37 $^{\circ}\text{C}$ with 0.1 $^{\circ}\text{C}$ fluctuation

Secure



- **Collision protection**
Vertical and horizontal collision protection for sample and reagent probes

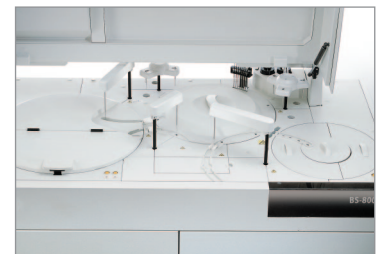

- **Waterproof design**
Waterproof cover for all electronic components with specialized channel on cover panel to direct water away



Innovative

Coaxial reagent disk

Specialized coaxial reagent disk makes replacing reagents convenient while half cover design improves user safety




Reagent bubble detection

Able to detect bubbles in reagent bottles, as well as detect real liquid level before reagent aspiration



Dot light source

Dual-diaphragm and dual-lens technologies enable dual-focus of forward light. These technologies create a high intensity, focused light which improves accuracy and decreases minimum reaction volume

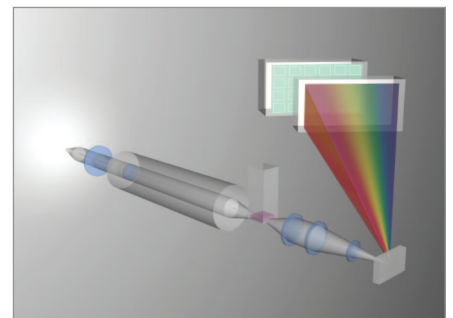

Water quality monitor

Analyzes and monitors quality of deionized water via resistance principle, reducing possible contamination



Cost-efficient

- **Large capacity**

140 sample positions, 300 additional sample positions via optional Sample Delivery Module (SDM), 68 onboard tests together with a reaction disk with 165 permanent glass cuvettes give users improved walk-away convenience




- **Low reagent consumption**

100 µL minimum reaction volume reduces reagent cost. Unique design of reagent bottle minimizes residual volume



- **One key STAT**

Perform STAT tests instantly with one key. Dedicated STAT sample disk and racks facilitate easier as well as prompt STAT testing

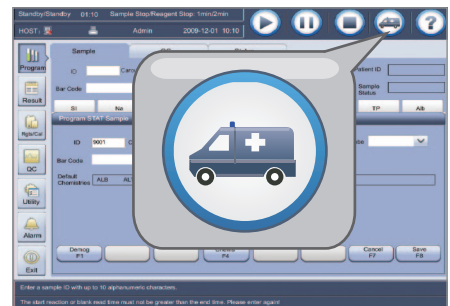


- **Continuous reagent loading and unloading**

Two disk rotation buttons allow safe continuous loading and unloading during testing



- **Indirect ISE**

Lower sample consumption and higher ISE measurement throughput, as well as cost-effective electrodes that support up to 60,000 tests (20,000 tests/electrode)

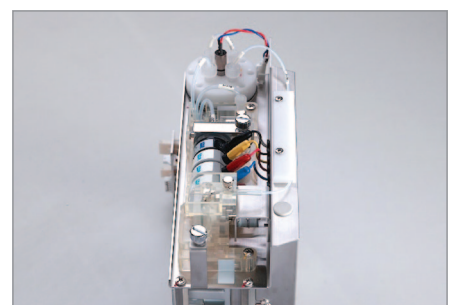

BS-800 Modular System

Clinical Chemistry Solution

Technical Specifications

System Function:

Throughput: BS-800: 800T/H, up to 1200T/H with ISE
BS-800M1-4:
From 800T/H to 3200T/H, and 1200T/H to 4800T/H with ISE

Sample Handling:

Sample tray: 140 positions including 25 cooling positions for calibrators and controls
SDM: 300 samples capacity with 30 racks
Sample volume: 1.5~35 μ L, step at 0.1 μ L
Sample probe: Liquid level detection, clot detection and collision protection

Reagent Handling:

Reagent tray: 120 positions in coaxial disks
Reagent volume: 15~300 μ L, step at 0.5 μ L
Sample probe: Liquid level detection, bubble detection and collision protection

External Bar Code Reader (optional):

Used for sample and reagent programming;
Applicable to various bar code systems including Codabar, ITF (Interleaved Two of Five), Code128, Code39, UPC/EAN, Code93;
Capable to communicate with LIS in a bi-directional mode

Reaction System:

Reaction volume: 100~360 μ L
Operating temperature: 37°C with 0.1°C fluctuation

Optical System:

Light source: Halogen tungsten lamp
Photometer: Reversed optics, grating photometry
Wavelength: 340nm, 380nm, 412nm, 450nm, 505nm, 546nm, 570nm, 605nm, 660nm, 700nm, 740nm, 800nm
Absorbance range: 0~3.4Abs(10mm conversion)

ISE Module (Optional):

Principle: Indirect K^+ , Na^+ Cl^- , with 22 μ L sample aspiration

Control and Calibration:

Calibration mode: Linear (one-point, two-point and multi-point), Logit-Log 4P, Logit-Log 5P, Spline, Exponential, Polynomial, Parabola
Control rules: Westgard multi-rule, Twin plot

Operation Unit:

Operation system: Windows® XP Professional/Home SP2 or above

DISTRIBUTOR:



MINDRAY is a trademark of Shenzhen Mindray Bio-Medical Electronics Co., Ltd. Specifications subject to changes without prior notice.
© 2010 Shenzhen Mindray Bio-Medical Electronics Co., Ltd. All rights reserved.
P/N: ENG-BS800MS-210285x8-20100715

mindray

Mindray is listed on the NYSE under the symbol "MR"
Mindray Building, Keji 12th Road South, High-tech Industrial Park,
Nanshan, Shenzhen 518057, P.R. China
Tel: +86 755 26582888 Fax: +86 755 26582680
E-mail: intl-market@mindray.com Website: www.mindray.com